





## ECOCONDENS GOLD PLUS

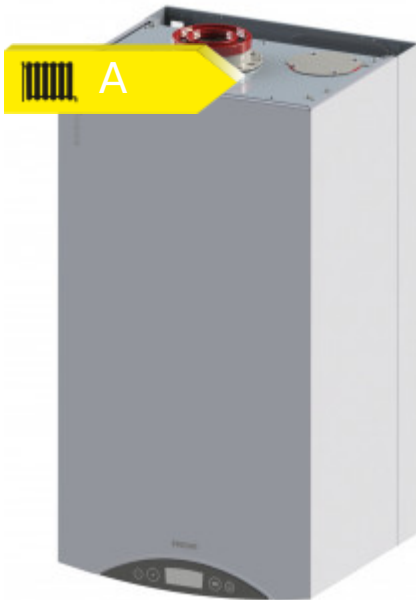

Wall mounted gas condensing boilers ECOCONDENS GOLD PLUS are characterized by modern, technically advanced design, easy to operate for the installer and the user as well. Components of renowned international companies guarantee the highest level of quality, as well as provide a solution with the highest efficiency.

Technical features of the product – a.o. modulation of the device up to 3 kW, as well as high quality were appreciated by a committee of experts, which resulted in awarding the Gold Medal of 2016 - Poznań International Fair.

ECOCONDENS GOLD PLUS boilers are equipped with remote control systems via smartphone or tablet by an individual customer and remote monitoring of the boiler by a service technician in order to optimize the operation of the devices and increase the operating comfort.

- new generation stainless steel heat exchanger with aluminium burner door, resulting in less heat loss
- wide modulation range: from 11 to 100%
- high efficiency circulation pump
- stepless speed regulation fan (controlled electronically)
- cylinder burner made of stainless steel – low level of NO<sub>x</sub> emission (6th class)
- complete protection system
- optimization of boiler operation is possible due to application of:
  - outdoor temperature sensor
  - temperature regulator: ON/OFF, Open-Therm or 0-10V,
  - ROUND system for remote boiler control via smartphone,
  - EVOHOME system for remote control of up to 11 heating zones
  - ready-to-use multi-zone modules for controlling up to 3 SIM heating systems
- boilers can also cooperate with:
  - heat pumps air/water
  - solar panels
  - domestic hot water cylinder by 3-way valve (concerns system boilers)
- possibility of remote monitoring of the boiler by service technician (LIN system)

# Accessories

BASIC PACKAGE "COMFORT SYSTEM"




Image not found or type unknown

TERMET ST-292 V2



TERMET ST-292 V3



OUTSIDE TEMPERATURE SENSOR



## parameters

## Value

|   |                    |
|---|--------------------|
| Thermal power (at temp. 80/60°C)  | 3,0 - 19,1 kW      |
| Thermal power (at temp. 50/30°C)  | 3,4 - 21,0 kW      |
| Heat load   | 3,1 - 19,5 kW      |
| Seasonal space heating energy efficiency $\eta_s$   | 94 %               |
| Efficiency of the boiler at nominal load and average boiler water temperature of 70°C                 | 98,0 %             |
| Efficiency of the boiler at partial load and return water temperature of 30°C                         | 108,0 %            |
| Seasonal space heating energy efficiency class  | A                  |
| Useful heat output at rated thermal power P4 (for modulated boilers - arithmetic mean of min and max) | 19,1 kW            |
| Useful heat output at 30% of rated power P1 (for modulated boilers - 30% of arithmetic mean)          | 6,3 kW             |
| Efficiency $\eta_4$   | 88,1 %             |
| Efficiency $\eta_1$   | 98,7 %             |
| Max water pressure  | 3 bar              |
| Max CH temperature  | 95 °C              |
| Standard adjustable temperature   | 40 - 80 °C         |
| Reduced adjustable temperature  | 25 - 55 °C         |
| Pump head at 0 flow   | 0,7 bar            |
| Range of water temperature regulation   | 30 - 60 °C         |
| Sound power level LWA   | 46 dB              |
| Emission of nitrogen dioxide  | 40 mg/kWh          |
| Emission class of nitrogen dioxide (NOx)  | 6                  |
| Expansion vessel capacity   | 6 dm <sup>3</sup>  |
| Standby mode power consumption PSB  | 0,003 kW           |
| Electricity consumption at full load elmax  | 0,07 kW            |
| Electricity consumption at partial load elmax   | 0,05 kW            |
| Type and supply voltage   | ~ 230 ±10%/ 50Hz V |
| Protection degree   | IPX4D              |
| Heating water and gas connection  | G 3/4 inch         |
| Dimensions  | 750 x 400 x 349 mm |
| Weight  | 34,0 kg            |
| Exchanger material  | stainless steel    |